



PE5N100Q N-Channel Enhancement Mode Power MOSFET

PE5N100Q Description

The PE5N100Q uses deep trench technology to provide excellent $R_{DS(ON)}$ and low gate charge. It can be used in a wide variety of applications.


PE5N100Q General Features

- $V_{DS} = 1000V$, $I_D = 5A$
- $R_{DS(ON)} < 2.9\Omega$ @ $V_{GS}=10V$


- Gate Charge Minimized
- Fast Switching and High-efficiency
- Lead free product is acquired

PE5N100Q Application


- AC-DC application
- Power supply



Schematic diagram

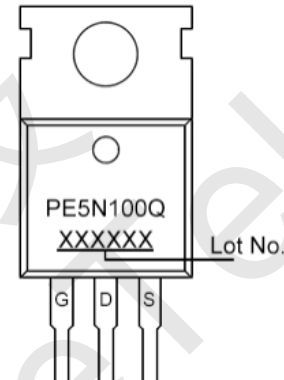

Marking and pin assignment

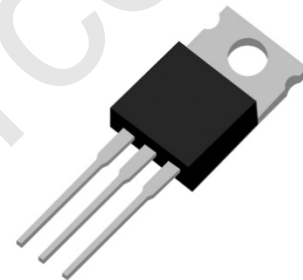

TO-220

PE5N100Q Absolute Maximum Ratings (TC=25°C unless otherwise noted)

Parameter	Symbol	Rating	Unit
Drain-Source Voltage	V_{DS}	1000	V
Gate-Source Voltage	V_{GS}	± 30	V
Drain Current-Continuous	I_D	5	A
Drain Current-Continuous (TC=100°C)	$I_D(TC=100^\circ C)$	3.1	A
Pulsed Drain Current (Note 1)	I_{DM}	15.2	A
Maximum Power Dissipation (TC=100°C)	P_D	30	W
Maximum Power Dissipation (TA=100°C)	P_D	2	W
Single Pulsed Avalanche Energy (L=30mH)	E_{AS}	183	mJ
Operating Junction and Storage Temperature Range	T_J, T_{STG}	-55 To 150	°C

PE5N100Q Thermal Characteristic

Thermal Resistance, Junction-to-Case (Note 2)	$R_{\theta JC}$	4.2	°C/W
Thermal Resistance, Junction-to-Ambient (Note 2)	$R_{\theta JA}$	62.5	°C/W



PE5N100Q Electrical Characteristics (TC=25°C unless otherwise noted)

Parameter	Symbol	Condition	Min	Typ	Max	Unit
Off Characteristics						
Drain-Source Breakdown Voltage	BV_{DSS}	$V_{GS}=0V, I_D=250\mu A$	1000	-	-	V
Zero Gate Voltage Drain Current	I_{DSS}	$V_{DS}=1000V, V_{GS}=0V$	-	-	10	μA
Gate-Body Leakage Current	I_{GSS}	$V_{GS}=\pm 30V, V_{DS}=0V$	-	-	± 100	nA
On Characteristics (Note 3)						
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_D=250\mu A$	3	4	5	V
Drain-Source On-State Resistance	$R_{DS(ON)}$	$V_{GS}=10V, I_D=2.5A$	-	2.6	2.9	Ω
Forward Transconductance	g_{FS}	$V_{DS}=5V, I_D=2.5A$	-	5	-	S
Dynamic Characteristics (Note 4)						
Input Capacitance	C_{iss}	$V_{DS}=25V, V_{GS}=0V,$ $F=1.0MHz$	-	1570	-	pF
Output Capacitance	C_{oss}		-	94	-	pF
Reverse Transfer Capacitance (Note 4)	C_{rss}		-	3.5	-	pF
Gate Resistance	R_g	$F=1.0MHz$	-	2.9	-	Ω
Switching Characteristics						
Turn-on Delay Time	$t_{d(on)}$	$V_{DD}=800V, I_D=5A,$ $V_{GS}=10V, R_G=10\Omega$	-	21	-	nS
Turn-on Rise Time	t_r		-	24	-	nS
Turn-Off Delay Time	$t_{d(off)}$		-	33	-	nS
Turn-Off Fall Time	t_f		-	52	-	nS
Total Gate Charge	Q_g	$V_{DS}=800V, I_D=5A,$ $V_{GS}=10V$	-	25	-	nC
Gate-Source Charge	Q_{gs}		-	9.7	-	nC
Gate-Drain Charge	Q_{gd}		-	6.3	-	nC
Drain-Source Diode Characteristics						
Diode Forward Voltage (Note 3)	V_{SD}	$V_{GS}=0V, I_S=5A$	-	0.85	-	V
Body Diode Reverse Recovery Time	t_{rr}	$V_{dd}=100V, I_S=5A,$ $V_{GS}=0V, di/dt=100A/\mu s$	-	570	-	nS
Body Diode Reverse Recovery Charge	Q_{rr}		-	4250	-	nC

Notes:

1. Repetitive Rating: Pulse width limited by maximum junction temperature.
2. Surface Mounted on FR4 Board, $t \leq 10$ sec.
3. Pulse Test: Pulse Width $\leq 300\mu s$, Duty Cycle $\leq 2\%$.
4. Guaranteed by design, not subject to product.



PE5N100Q Typical Electrical and Thermal Characteristics

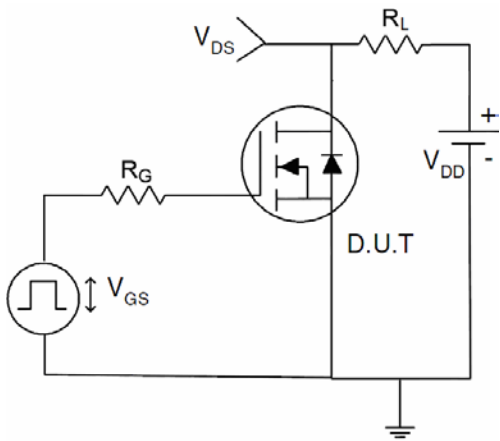


Figure 1 Switching Test Circuit

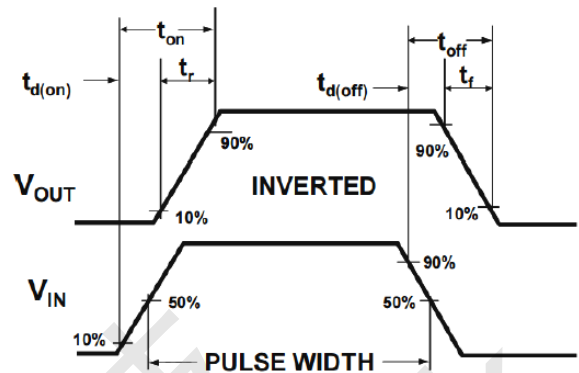


Figure 2 Switching Waveform

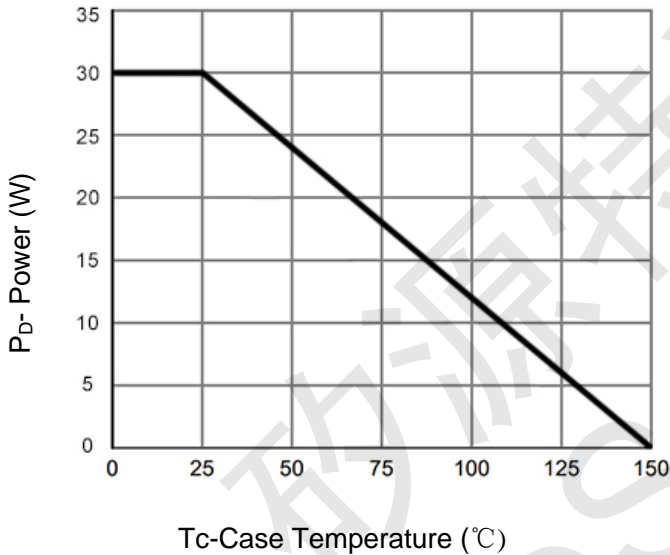


Figure 3 Power De-rating

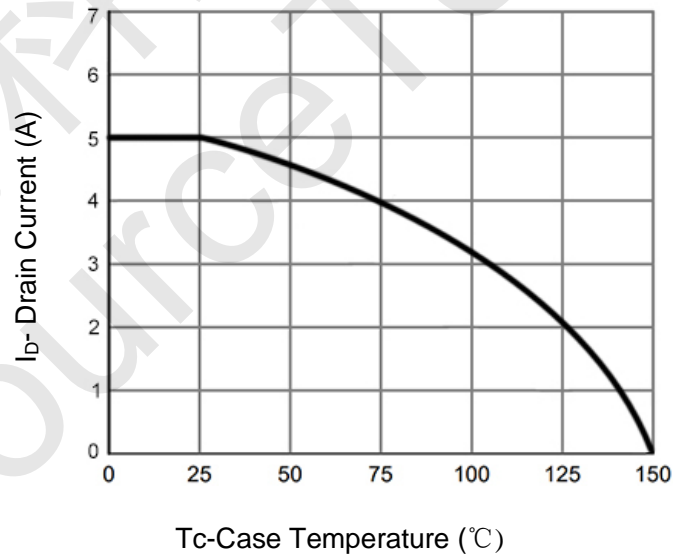


Figure 4 Drain Current

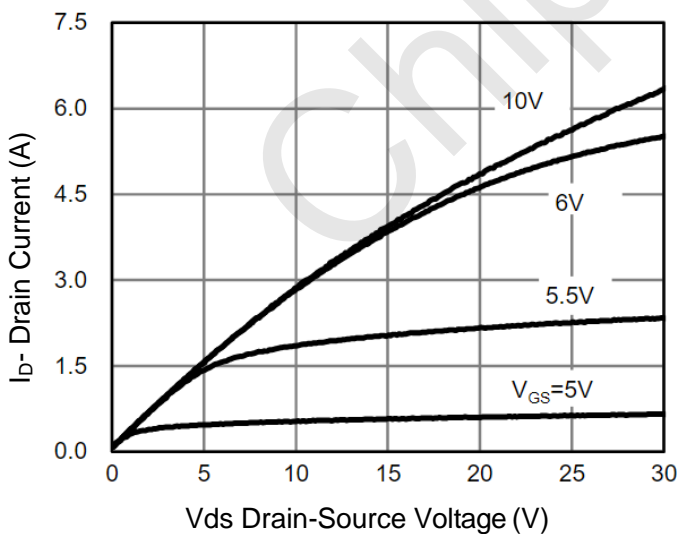


Figure 5 Output Characteristics

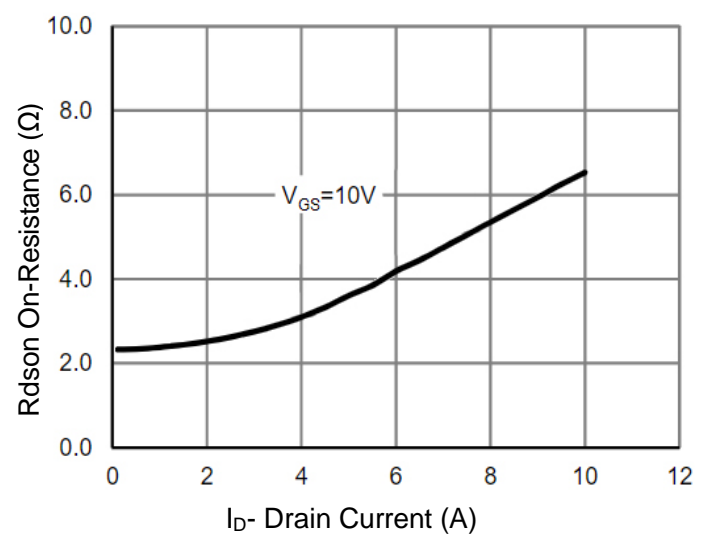


Figure 6 Rdson vs Drain Current

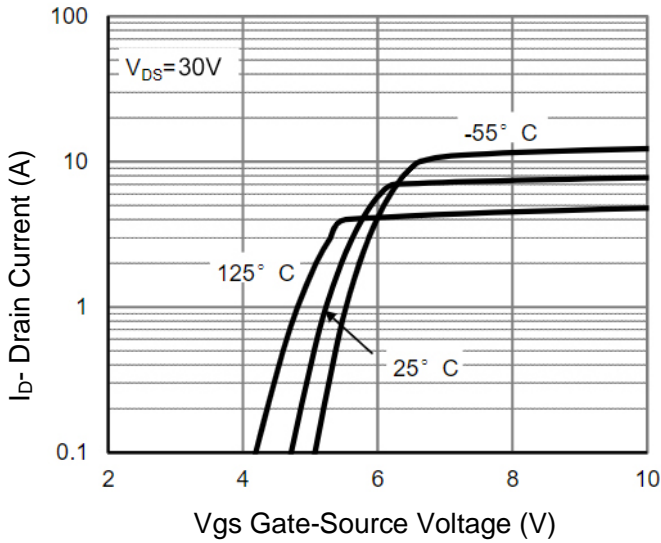


Figure 7 Transfer Characteristics

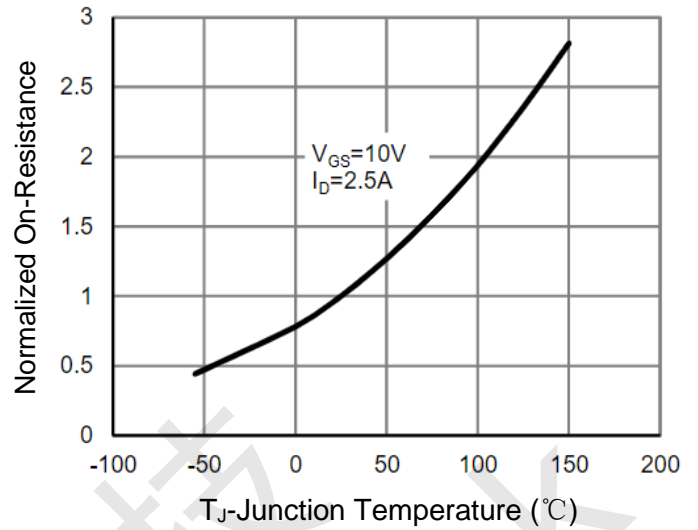


Figure 8 R_{DS(on)} vs Junction Temperature

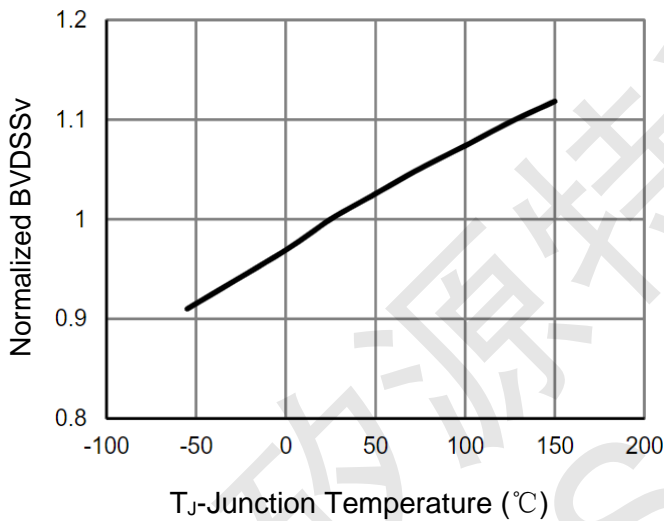


Figure 9 BVDSS vs T_J

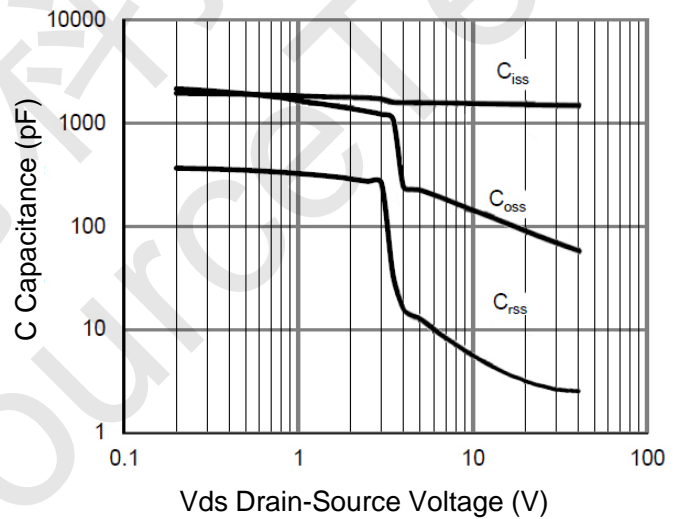


Figure 10 Capacitance vs V_{DS}

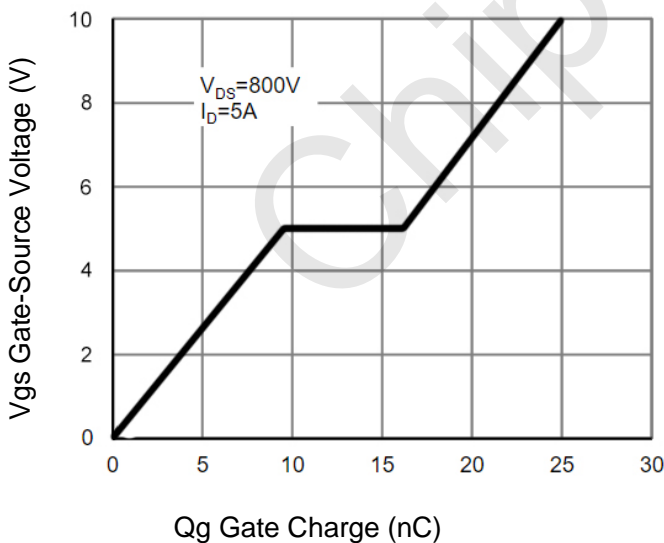


Figure 11 Gate Charge

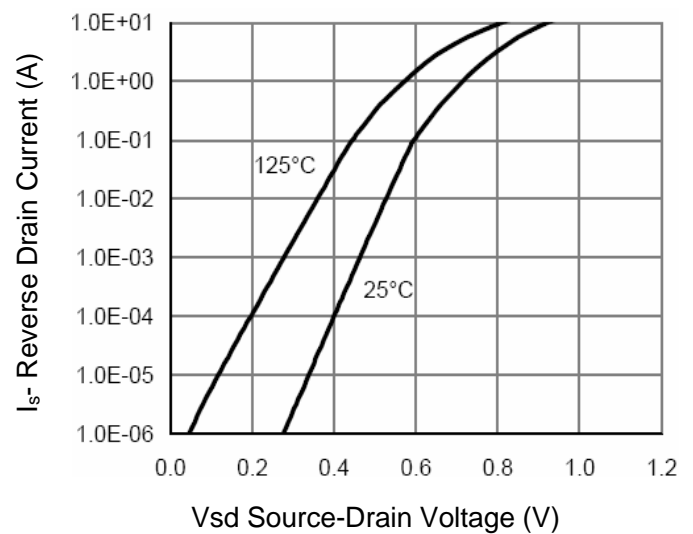


Figure 12 Source- Drain Diode Forward

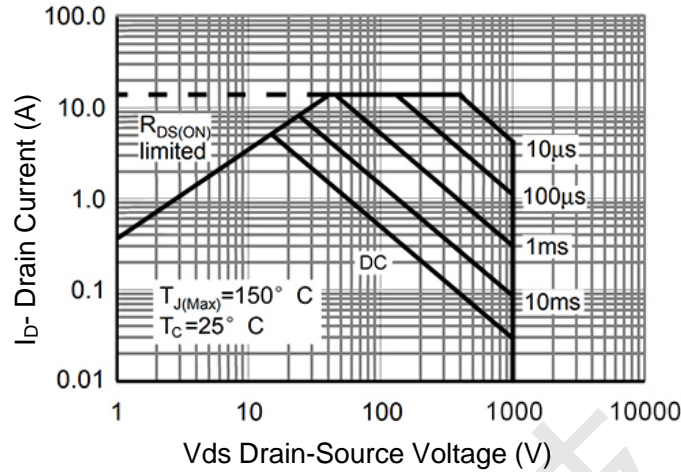


Figure 13 Safe Operation Area


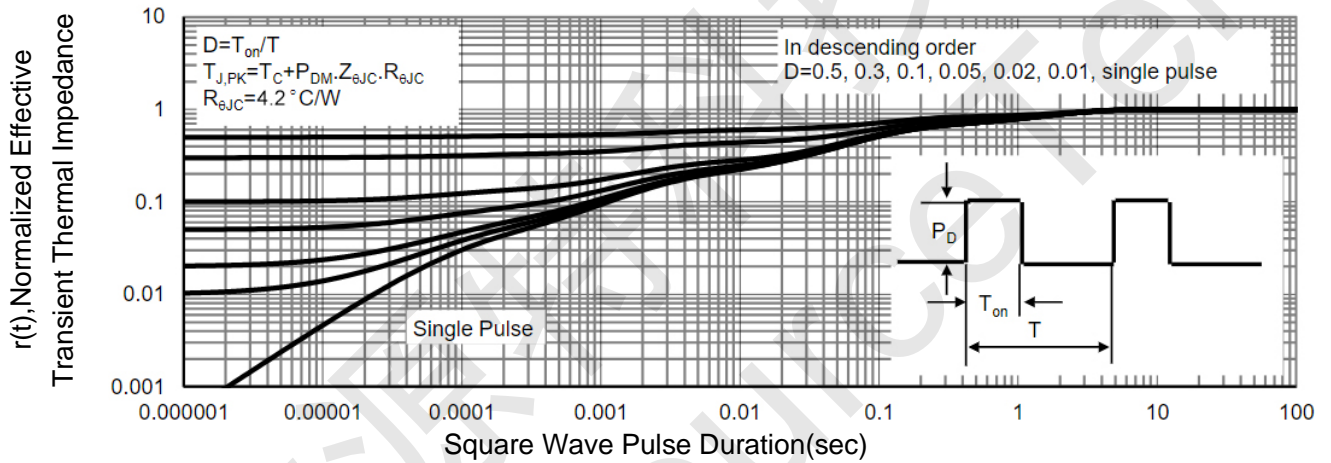


Figure 14 Normalized Maximum Transient Thermal Impedance



PE5N100Q TO-220 Package Information

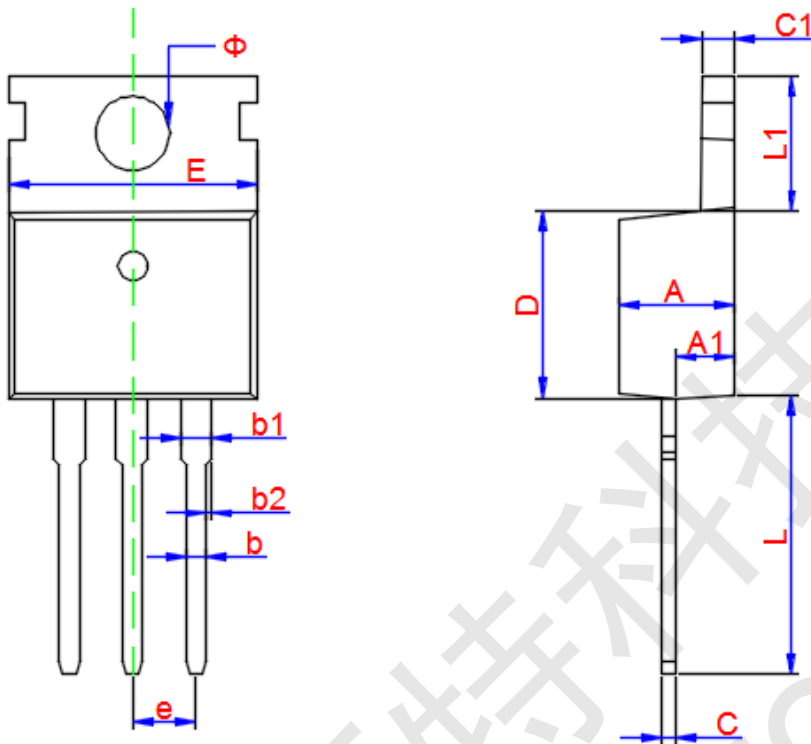

Symbol	Dimensions In Millimeters		
	Min.	Typ.	Max.
A	4.520	4.570	4.620
A1	2.320	2.350	3.380
b	0.800 TYP.		
b1	1.270 TYP		
b2	0-0.076		
C	0.500 TYP.		
C1	1.300 TYP.		
D	9.050	9.100	9.150
E	9.880 TYP.		
e	2.540 TYP.		
L	13.160	13.260	13.360
L1	6.400	6.500	6.600
Φ	3.600 TYP.		