




XYT4050K N-Channel Trench Power MOSFET

XYT4050K Features


- 40V,50A
- $R_{DS(ON)}=7.0m\Omega$ (Typ.) @ $V_{GS}=10V$
- $R_{DS(ON)}=8.7m\Omega$ (Typ.) @ $V_{GS}=4.5V$
- Advanced Trench Technology
- Provide Excellent $R_{DS(ON)}$ and Low Gate Charge
- 100% UIS Tested

XYT4050K Package



XYT4050K Application

- LCD TV
- Notebook
- Elevator
- Inductive heating
- Power tools
- Printer

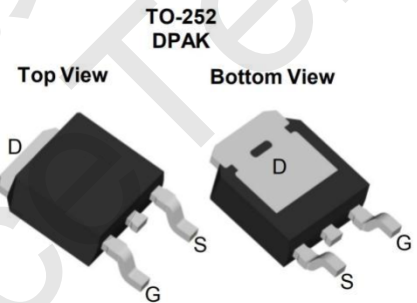

XYT4050K Package Marking and Ordering Information

Product ID	PACK	Qty (pcs)
XYT4050K	TO-252	2500

XYT4050K Absolute Maximum Ratings ($T_C=25^\circ C$ unless otherwise specified)

Symbol	Parameter	Value	Units	
V_{DSS}	Drain-Source Voltage	40	V	
V_{GSS}	Gate-Source Voltage	± 20	V	
I_D	Continuous Drain Current	$T_C = 25^\circ C$	54	A
		$T_C = 100^\circ C$	34	A
I_{DM}	Pulsed Drain Current ^{note1}	163	A	
E_{AS}	Single Pulsed Avalanche Energy ^{note2}	156	mJ	
P_D	Power Dissipation	$T_C = 25^\circ C$	28	W
$R_{\theta JC}$	Thermal Resistance, Junction to Case	4.3	$^\circ C/W$	
T_J, T_{STG}	Operating and Storage Temperature Range	-55 to +150	$^\circ C$	



XYT4050K Electrical Characteristics (T_C=25°C unless otherwise specified)

Symbol	Parameter	Test Condition	Min.	Typ.	Max.	Units
Off Characteristic						
V _{(BR)DSS}	Drain-Source Breakdown Voltage	V _{GS} =0V, I _D =250μA	40	-	-	V
I _{DSS}	Zero Gate Voltage Drain Current	V _{DS} =40V, V _{GS} =0V,	-	-	1.0	μA
I _{GSS}	Gate to Body Leakage Current	V _{DS} =0V, V _{GS} =±20V	-	-	±100	nA
On Characteristics						
V _{GS(th)}	Gate Threshold Voltage	V _{DS} =V _{GS} , I _D =250μA	1	1.6	2	V
R _{DS(on)}	Static Drain-Source on-Resistance note3	V _{GS} =10V, I _D =20A	-	7.0	9.1	mΩ
		V _{GS} =4.5V, I _D =15A	-	8.7	11.3	
g _{FS}	Forward Transconductance	V _{DS} =5V, I _D =15A	-	25	-	S
Dynamic Characteristics						
C _{iss}	Input Capacitance	V _{DS} =20V, V _{GS} =0V, f=1.0MHz	-	1409	-	pF
C _{oss}	Output Capacitance		-	138	-	pF
C _{rss}	Reverse Transfer Capacitance		-	120	-	pF
R _g	Gate resistance	-	-	1.8	-	Ω
Switching Characteristics						
Q _g	Total Gate Charge	V _{DS} =20V, I _D =20A, V _{GS} =10V	-	31.3	-	nC
Q _{gs}	Gate-Source Charge		-	3.7	-	nC
Q _{gd}	Gate-Drain("Miller") Charge		-	7.4	-	nC
V _{plateau}	Gate plateau voltage		-	2.8	-	V
t _{d(on)}	Turn-on Delay Time	V _{DS} =20V, V _{GS} =10V RL=1Ω, R _{GEN} =3Ω	-	6	-	ns
t _r	Turn-on Rise Time		-	17	-	ns
t _{d(off)}	Turn-off Delay Time		-	30	-	ns
t _f	Turn-off Fall Time		-	17	-	ns
Drain-Source Diode Characteristics and Maximum Ratings						
I _S	Maximum Continuous Drain to Source Diode Forward Current		-	-	50	A
I _{SM}	Maximum Pulsed Drain to Source Diode Forward Current		-	-	163	A
V _{SD}	Drain to Source Diode Forward Voltage	V _{GS} =0V, I _S =10A	-	-	1.2	V

- Notes: 1. Repetitive Rating: Pulse Width Limited by Maximum Junction Temperature
 2. EAS condition: T_J=25°C, V_{DD}=20V, V_G=10V, R_G=25Ω, L=0.5mH
 3. Pulse Test: Pulse Width≤300μs, Duty Cycle≤0.5%



XYT4050K Typical Performance Characteristics

Figure 1: On-Region Characteristics

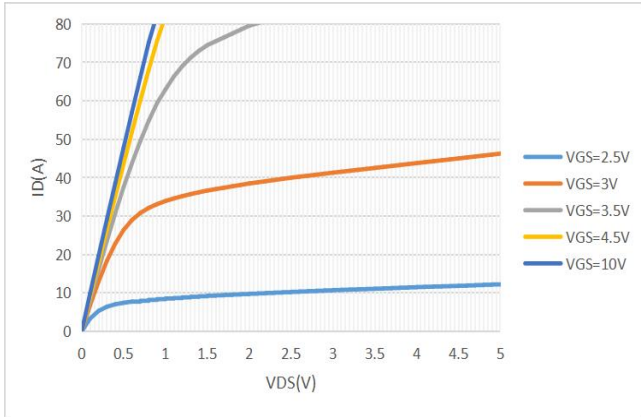


Figure 2: Transfer Characteristics

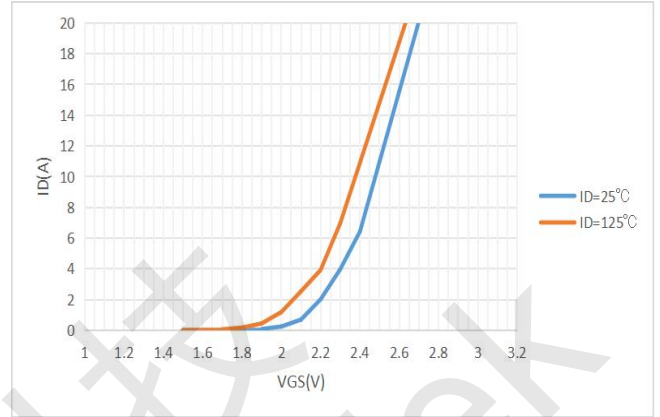


Figure 3: On-resistance vs. Drain Current and Gate Voltage

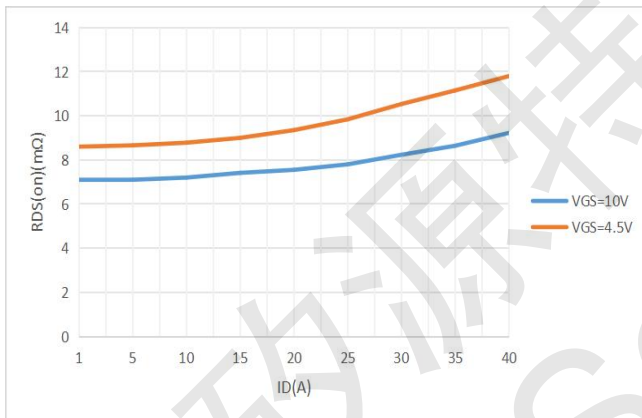


Figure 4: On-Resistance vs. Gate-Source Voltage

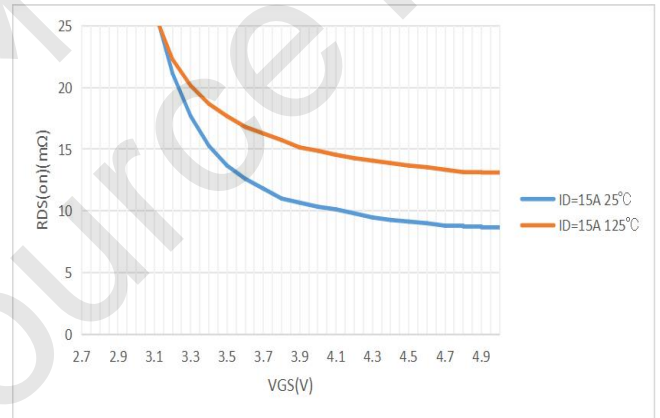


Figure 5: On-Resistance vs. Junction Temperature


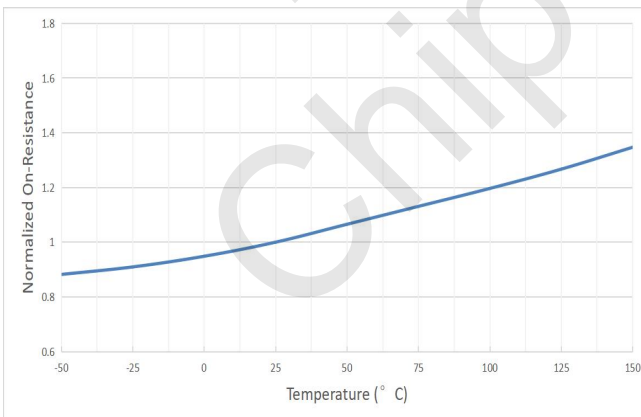


Figure 6: Body-Diode Characteristics



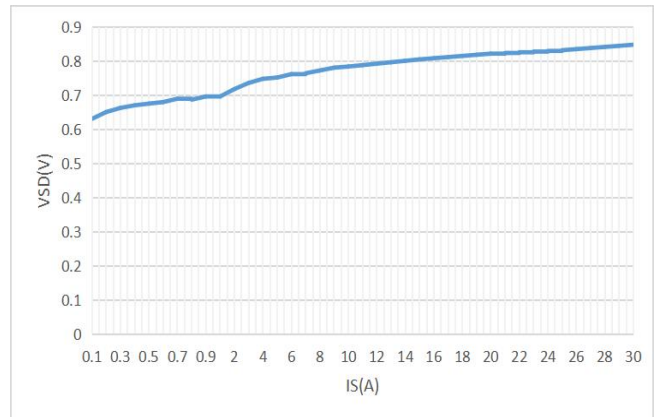

XYT4050K Typical Performance Characteristics

Figure7: Capacitance Characteristics C(pF)

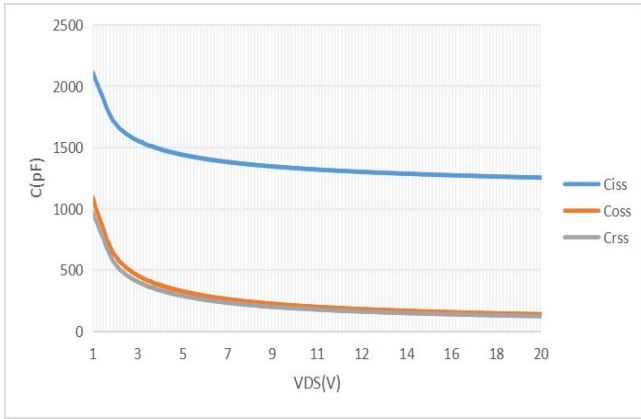


Figure 8: Gate-Charge Characteristics

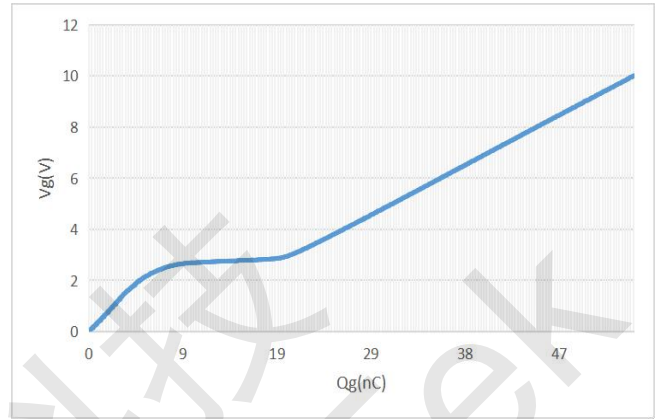


Figure9: Maximum Forward Biased Safe Operating Area


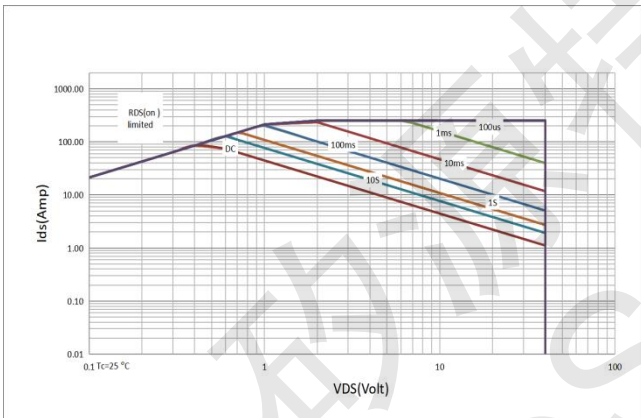


Figure 10: Current De-rating



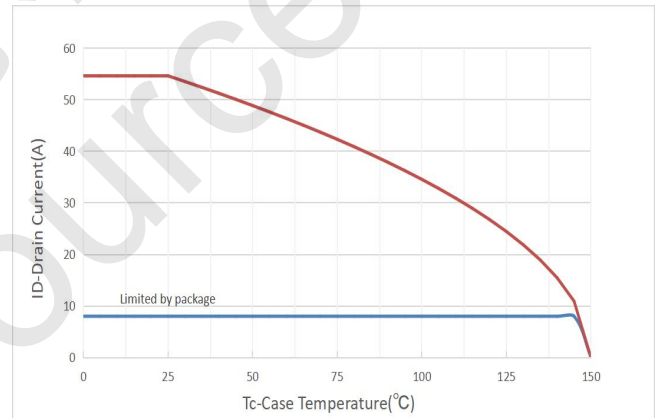

XYT4050K Test Circuit

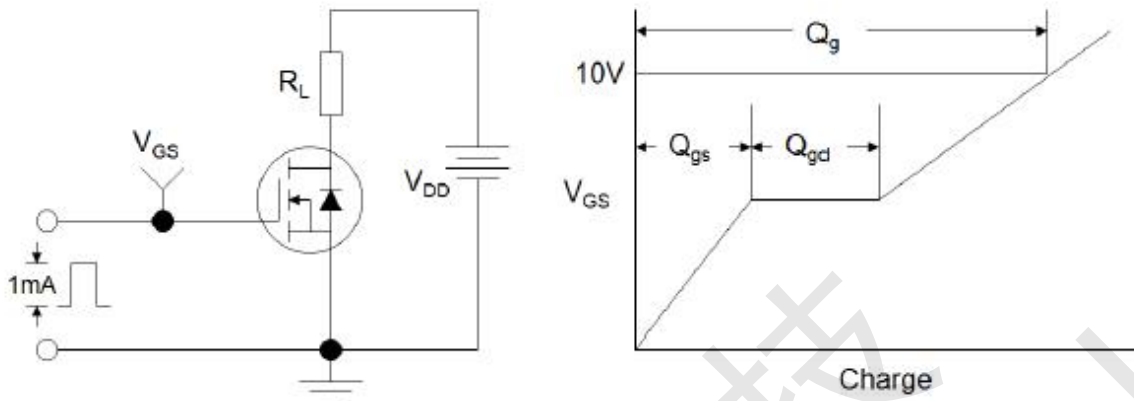


Figure1:Gate Charge Test Circuit & Waveform

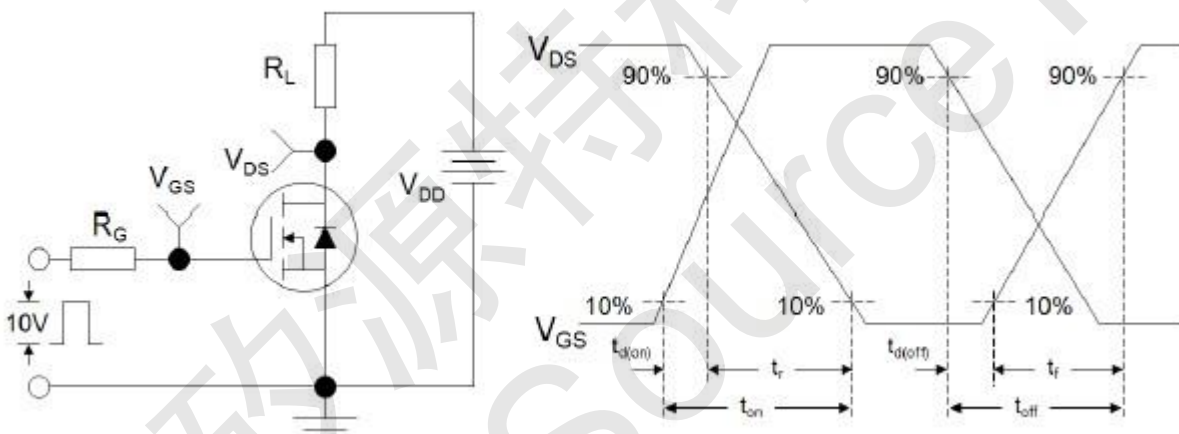


Figure 2: Resistive Switching Test Circuit & Waveforms

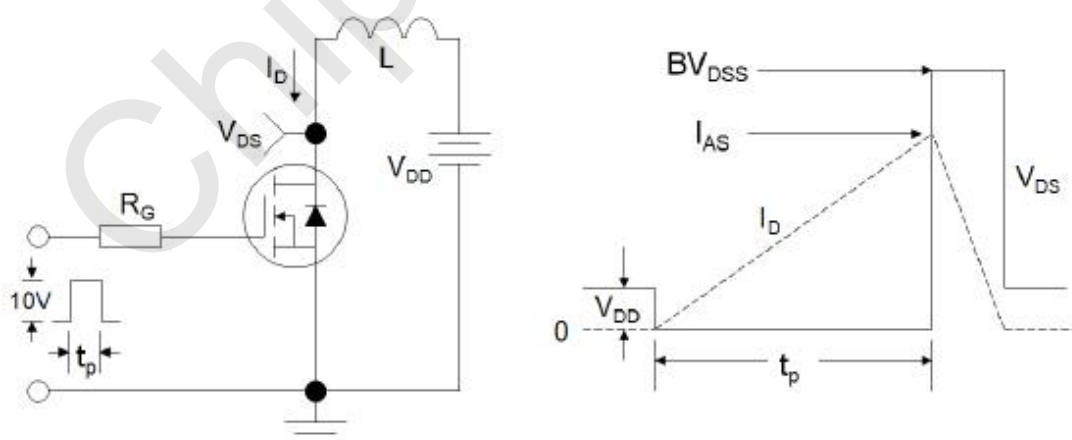


Figure 3:Unclamped Inductive Switching Test Circuit & Waveforms



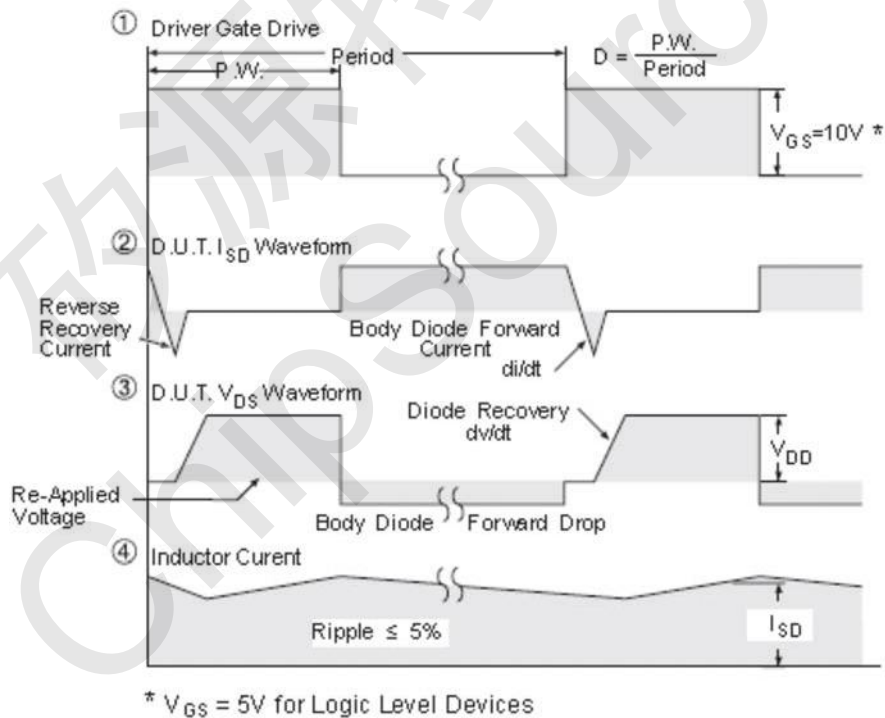


Figure 4: Peak Diode Recovery dv/dt Test Circuit & Waveforms (For N-channel)

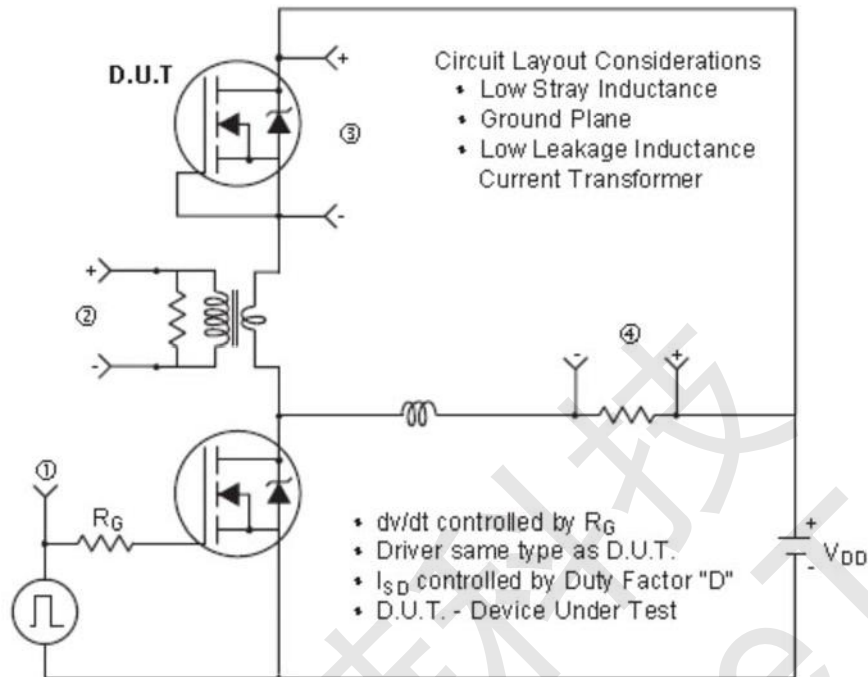

XYT4050K TO-252 Package Information

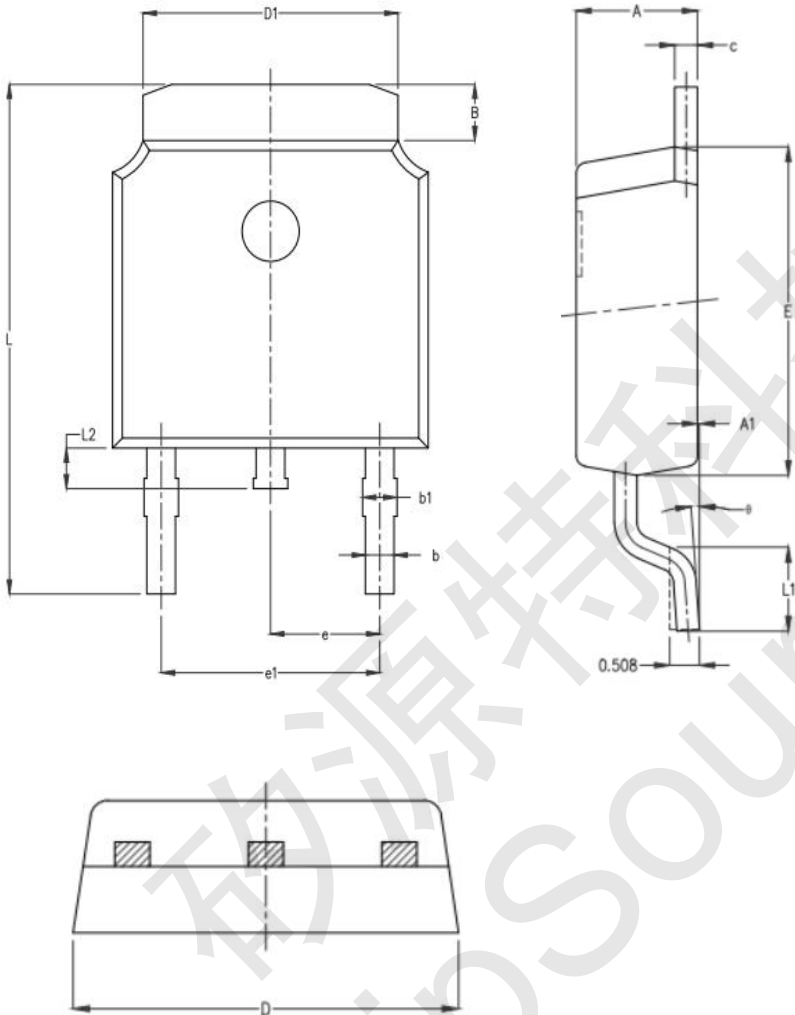

SYMBOL	MILLIMETER		
	MIN	NOM	MAX
A	2.15	2.25	2.35
A1	0.00	0.06	0.12
B	0.96	1.11	1.26
b	0.59	0.69	0.79
b1	0.69	0.81	0.93
c	0.34	0.42	0.50
D	6.45	6.60	6.75
D1	5.23	5.33	5.43
E	5.95	6.10	6.25
e	2.286TYP.		
e1	4.47	4.57	4.67
L	9.90	10.10	10.30
L1	1.40	1.55	1.70
L2	0.60	0.80	1.00
θ	0°	4°	8°